



3/8" Square Panel Potentiometer Miniature - Cermet - Fully Sealed



FEATURES


- Industrial Grade
- 0.5 W at 70 °C
- Miniature compact
- Plastic housing and shaft
- Fully sealed
- 7 standard pin styles
- 10 000 cycles rotational life
- RoHS compliant since date code 0452



RoHS
COMPLIANT

P10 panel potentiometer combines the very good setting stability offered by VISHAY SFERNICE trimmers (due to their proprietary multifinger wiper), with a mechanical life of 10 000 cycles.

It is an ideal choice to set and control parameters such as temperature, time, volume levels, etc.

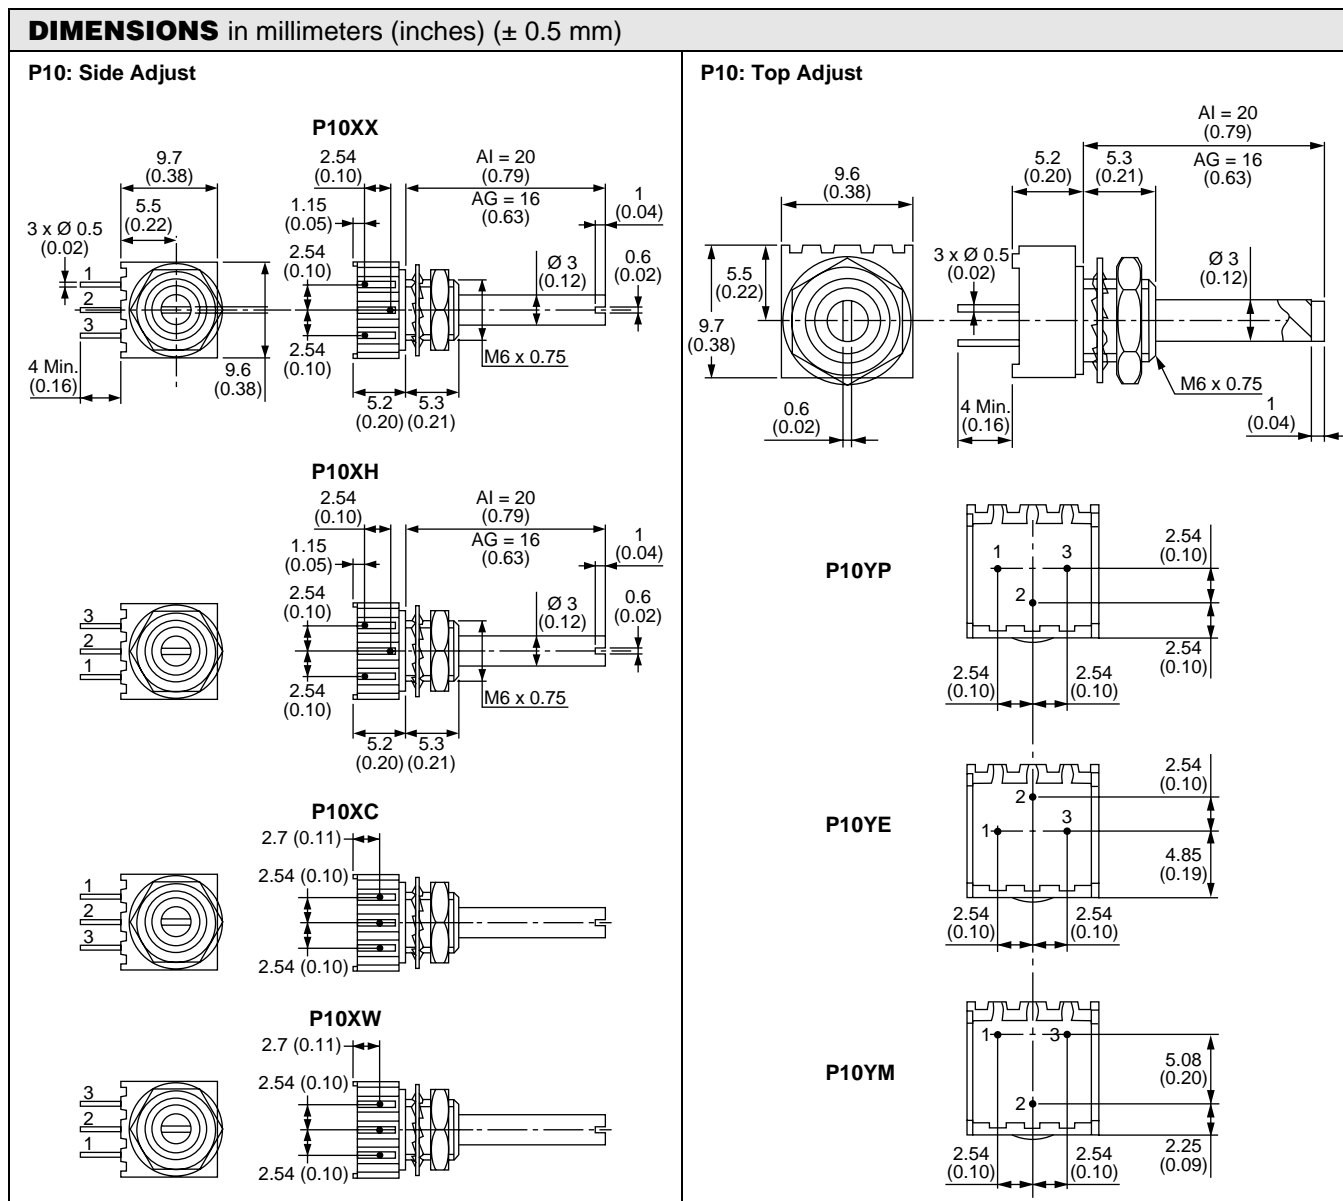



ELECTRICAL SPECIFICATIONS																																																											
Resistive Element	CERMET																																																										
Electrical Travel	250° ± 15°																																																										
Standard Resistance Values	100 Ω to 2 MΩ																																																										
Tolerance	10 % - 5 % on request																																																										
Variation Law	Linear A																																																										
	<p>CIRCUIT DIAGRAM</p> <p>OUTPUT VOLTAGE RATIO (%)</p>																																																										
Power Rating	<p>0.5 W at 70 °C</p>																																																										
Standard Resistance Element Data	<table border="1"> <thead> <tr> <th>Standard Resistance Values</th> <th>Max. Power at 70 °C</th> <th>Max. Working Voltage</th> <th>Max. Cur. Through Wiper</th> </tr> <tr> <th>W</th> <th>W</th> <th>V</th> <th>mA</th> </tr> </thead> <tbody> <tr><td>100</td><td>0.5</td><td>7.0</td><td>70</td></tr> <tr><td>200</td><td rowspan="5" style="text-align: center;">↓</td><td>10.0</td><td>50</td></tr> <tr><td>500</td><td>15.8</td><td>32</td></tr> <tr><td>1K</td><td>22.4</td><td>22</td></tr> <tr><td>2K</td><td>31.8</td><td>16</td></tr> <tr><td>5K</td><td>50.0</td><td>10</td></tr> <tr><td>10K</td><td rowspan="5" style="text-align: center;">↓</td><td>70.7</td><td>7.0</td></tr> <tr><td>20K</td><td>100</td><td>5.0</td></tr> <tr><td>50K</td><td>158</td><td>3.2</td></tr> <tr><td>100K</td><td>0.5</td><td>224</td><td>2.2</td></tr> <tr><td>200K</td><td>0.28</td><td>250</td><td>1.3</td></tr> <tr><td>500K</td><td>0.13</td><td>250</td><td>0.5</td></tr> <tr><td>1M</td><td>0.06</td><td>250</td><td>0.25</td></tr> <tr><td>2M</td><td>0.028</td><td>250</td><td>0.13</td></tr> </tbody> </table>	Standard Resistance Values	Max. Power at 70 °C	Max. Working Voltage	Max. Cur. Through Wiper	W	W	V	mA	100	0.5	7.0	70	200	↓	10.0	50	500	15.8	32	1K	22.4	22	2K	31.8	16	5K	50.0	10	10K	↓	70.7	7.0	20K	100	5.0	50K	158	3.2	100K	0.5	224	2.2	200K	0.28	250	1.3	500K	0.13	250	0.5	1M	0.06	250	0.25	2M	0.028	250	0.13
Standard Resistance Values	Max. Power at 70 °C	Max. Working Voltage	Max. Cur. Through Wiper																																																								
W	W	V	mA																																																								
100	0.5	7.0	70																																																								
200	↓	10.0	50																																																								
500		15.8	32																																																								
1K		22.4	22																																																								
2K		31.8	16																																																								
5K		50.0	10																																																								
10K	↓	70.7	7.0																																																								
20K		100	5.0																																																								
50K		158	3.2																																																								
100K		0.5	224	2.2																																																							
200K		0.28	250	1.3																																																							
500K	0.13	250	0.5																																																								
1M	0.06	250	0.25																																																								
2M	0.028	250	0.13																																																								
Temperature Coefficient (Typical)	± 150 ppm/°C																																																										
Contact Resistance Variation	1 % Rn or 2 Ω																																																										
End Resistance (Typical)	1 Ω																																																										
Dielectric Strength (RMS)	1000 V																																																										
Insulation Resistance (300 VDC)	10 ⁶ MΩ																																																										

3/8" Square Panel Potentiometer Miniature - Cermet - Fully Sealed



P10

Vishay Sfernice

MECHANICAL SPECIFICATIONS		
Mechanical Travel	290° ± 5	
Operating Torque (Typical)	2 Ncm max.	2.83 oz.-inch max.
End Stop Torque	7 Ncm max.	9.9 oz.-inch max.
Tightening Torque of Mounting Nut	25 Ncm max.	2.2 lb-inch max.
Unit Weight	1 g	3.5 10 ⁻² oz.
Terminals	e3: pure Sn	
Shafts	Standard shaft 20 mm length (R or AI code) and 16 mm length (D or AG code) is measured from the mounting face to the free end of the shaft. Vishay guarantee is lost if the customer modifies the shaft himself.	
Hardware	Nuts and washer are supplied separately (not mounted on the potentiometer) in a small bag placed in the packaging.	

ENVIRONMENTAL SPECIFICATIONS	
Temperature Range	- 55 °C to 125 °C
Climatic Category	55/100/56
Sealing	Fully sealed - Container IP67

MARKING	
<ul style="list-style-type: none"> VISHAY trademark Model Ohmic Value code Tolerance code Manufacturing date code Marking of terminals 3 	<p>The ohmic value is indicated by a 3 figures code: the first two digits are significant figures, the third digit is the multiplier:</p> <p>Example: 101 = 100 Ω 102 = 1000 Ω 503 = 50 000 Ω</p> <p>The manufacturing date is indicated by a figures code. The first two digits are the year, the last two digits are the week.</p>

SAP ORDERING INFORMATION (Part Number 18 digits)																	
P	1	0	X	X	A	G	1	0	3	K	B	3	0				
MODEL	STYLE		SHAFT		RESISTANCE CODE		TOLERANCE CODE		PACKAGING CODE		SPECIAL NUMBER						
P10	XC XH XW XX YE YM YP		AG = Ø 3 - 16 mm (old code R) AI = Ø 3 - 20 mm (old code D)		From 100 Ω to 2 MΩ 103 = 10 kΩ		K = 10 % On request J = 5 %		B30 = Box 100 pieces		(if applicable) Given by VISHAY for custom design						

PART NUMBER DESCRIPTION (for information only)							
P10	XX	AG	10K	10 %		BO100	e3
MODEL	STYLE	SHAFT	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD (Pb)-FREE