

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Railway



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



3000
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

6
sided
Shielding

Internal
EN55032
Class **A**
Filter

LOW
Standby
Power

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OVP

SCP

UVP

PART NUMBER STRUCTURE

VPD15	-	48	S	05	W	-	M3	A	HC
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Operating Temp. Options	Remote ON/OFF & Trim Options	Assembly Options
		24:9~36 48:18~75 110:36~160	S:Single	3P3:3.3 05:5 12:12 15:15 24:24	4:1		□:Standard -40°C~105°C With derating M3:M3 Version -55°C~105°C With derating	□:Negative logic A:Positive logic B:Without Ctrl pin C:Negative logic without Trim pin D:Without Ctrl & Trim pin E:Positive logic without Trim pin	□: None HC: 7G-0047C-F; H=0.22" (※NRND) HC1: 7GA0117P01-F; H=0.3" HC2: 7GA0118P01-F; H=0.5" HC3: 7GA0119P01-F; H=0.8" ※NRND: Not recommended for new designs
			D: Dual	05:±5 12:±12 15:±15 24:±24					

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
VPD15-24S3P3W	9 ~ 36	3.3	4500	12	88	5200
VPD15-24S05W	9 ~ 36	5	3000	12	90	3600
VPD15-24S12W	9 ~ 36	12	1300	12	89	600
VPD15-24S15W	9 ~ 36	15	1000	12	90	500
VPD15-24S24W	9 ~ 36	24	625	12	91	200
VPD15-24D05W	9 ~ 36	±5	±1500	12	87	±1500
VPD15-24D12W	9 ~ 36	±12	±625	12	90	±360
VPD15-24D15W	9 ~ 36	±15	±500	12	90	±250
VPD15-24D24W	9 ~ 36	±24	±315	10	91	±100
VPD15-48S3P3W	18 ~ 75	3.3	4500	10	88	5200
VPD15-48S05W	18 ~ 75	5	3000	10	90	3600
VPD15-48S12W	18 ~ 75	12	1300	10	89	600
VPD15-48S15W	18 ~ 75	15	1000	10	90	500
VPD15-48S24W	18 ~ 75	24	625	10	91	200
VPD15-48D05W	18 ~ 75	±5	±1500	10	87	±1500
VPD15-48D12W	18 ~ 75	±12	±625	10	90	±360
VPD15-48D15W	18 ~ 75	±15	±500	10	90	±250
VPD15-48D24W	18 ~ 75	±24	±315	10	90	±100
VPD15-110S3P3W	36 ~ 160	3.3	4500	8	88	5200
VPD15-110S05W	36 ~ 160	5	3000	8	89	3600
VPD15-110S12W	36 ~ 160	12	1300	8	89	600
VPD15-110S15W	36 ~ 160	15	1000	8	89	500
VPD15-110S24W	36 ~ 160	24	625	8	90	200
VPD15-110D05 W	36 ~ 160	±5	±1500	8	86	±1500
VPD15-110D12 W	36 ~ 160	±12	±625	8	89	±360
VPD15-110D15 W	36 ~ 160	±15	±500	8	89	±250
VPD15-110D24 W	36 ~ 160	±24	±315	8	90	±100

INPUT SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Operating input voltage range	24Vin(nom) 48Vin(nom) 110Vin(nom)			9 18 36	24 48 110	36 75 160 VDC
Start up voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)					9 18 38 VDC
Shutdown voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)			7.5 15.5 32	8 16 34	8.8 17.5 35.5 VDC
Start up time	Constant resistive load	Power up Remote ON/OFF			30 30	40 40 ms
Input surge voltage	1 second, max.	24Vin(nom) 48Vin(nom) 110Vin(nom)				50 100 185 VDC
Input filter				Pi type		
Remote ON/OFF	Referred to –Vin pin	Positive logic (Option) Negative logic (Standard) Input current of Ctrl pin Remote off input current	DC-DC ON DC-DC OFF DC-DC ON DC-DC OFF	-0.5	Open or 3 ~ 15VDC Short or 0 ~ 1.2VDC Short or 0 ~ 1.2VDC Open or 3 ~ 15VDC 2.5	+1.0 mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	Single Dual	-0.2 -0.5		+0.2 +0.5	%
Load regulation	No Load to Full Load	Single Dual	-0.2 -1.0		+0.2 +1.0	%
	10% Load to 90% Load	Single Dual	-0.1 -0.8		+0.1 +0.8	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability	Single output	15Vout, 24Vout Others	-10 -10		+20 +10	%
Ripple and noise	Measured by 20MHz bandwidth					
	With a 10µF/6.3V X7R MLCC	Single 3.3Vout, 5Vout		75		mVp-p
	With a 1µF/25V X7R MLCC	12Vout, 15Vout		100		
	With a 2.2µF/50V X7R MLCC	24Vout		125		
	With a 10µF/6.3V X7R MLCC for each output	Dual 5Vout		75		
	With a 1µF/25V X7R MLCC for each output	12Vout, 15Vout		100		
	With a 2.2µF/50V X7R MLCC for each output	24Vout		125		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection		3.3Vout 5Vout 12Vout 15Vout 24Vout	3.7 5.6 13.5 18.3 29.1		5.4 7.0 19.6 22.0 32.5	VDC
Over load protection	% of Iout rated			170		%
Short circuit protection				Continuous, automatic recovery		

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output Input (Output) to Case	3000 1600			VDC
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					2000	pF
Switching frequency		3.3Vout, 5Vout Others	220 270	245 300	270 330	kHz
Safety approvals	IEC/ UL/ EN60950-1, 62368-1				UL:E193009 CB:UL(Demko)	
Standard approvals	EN50155 EN45545-2					
Case material						copper
Base material						FR4 PCB
Potting material						Silicone (UL94 V-0)
Weight						16.5g (0.58oz)
MTBF	MIL-HDBK-217F, Full load					1.672 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard type With derating M3 version With derating	-40 -55		+105 +105	°C
	VPD15- □□□D05W	meet the railway OT4 temperature requirement as power derating to 7W output power			
	The others	meet the railway OT4 temperature requirement as power derating to 10W output power.			
Maximum case temperature				105	°C
Storage temperature range		-55		+125	°C
Thermal impedance	Natural convection				
	Without Heat-sink		17.0		
	With Heat-sink		15.3		
	HC		12.9		°C/W
	HC1		10.9		
	HC2		9.3		
	HC3				
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032, EN55011	Without external components With external components.
		Class A Class B
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV
Radiated immunity	EN61000-4-3	20 V/m
Fast transient	EN61000-4-4	±2kV
	VPD15-24 □□□W	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) in parallel.
	VPD15-48 □□□W	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V).
	VPD15-110 □□□W	With an aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 150µF/200V) and a TVS (SMBJ300A, 300V, 600Watt peak pulse power) in parallel.
Surge	EN61000-4-5	±2kV
	VPD15-24 □□□W	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) in parallel.
	VPD15-48 □□□W	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V).
	VPD15-110 □□□W	With an aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 150µF/200V) and a TVS (SMBJ300A, 300V, 600Watt peak pulse power) in parallel.
Conducted immunity	EN61000-4-6	10 Vr.m.s
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

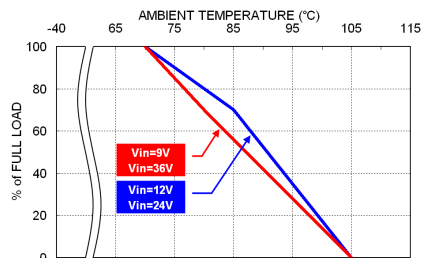

VPD15-24 0.5W Derating Curve

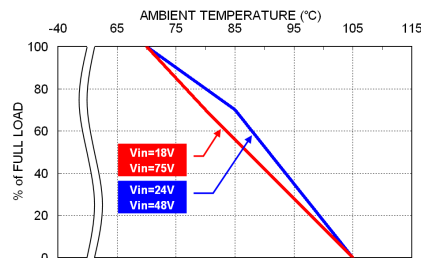


VPD15-48 0.5W Derating Curve

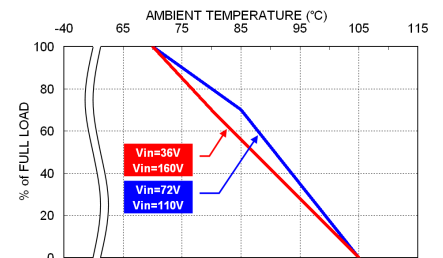


VPD15-110 0.5W Derating Curve


*Except for VPD15-0.5W D05W

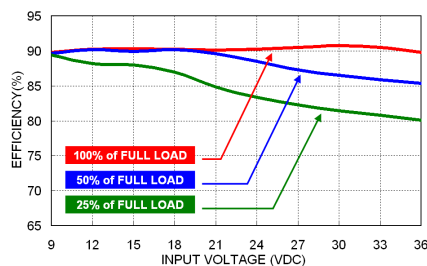

VPD15-24S05W Efficiency vs. Input Voltage

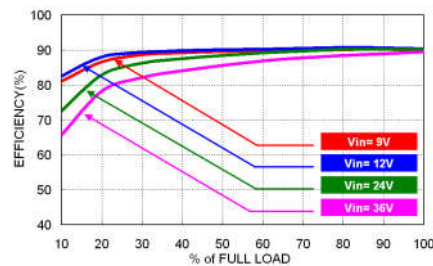

VPD15-24S05W Efficiency vs. Output Load

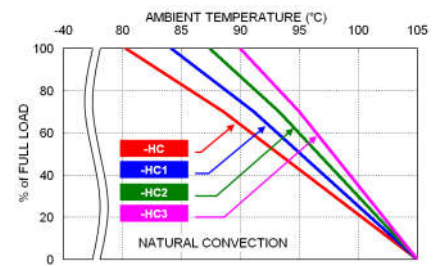

VPD15-24S05W Derating Curve With Heat-sink

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Modules	Fuse Rating (A)	Fuse Type
VPD15-24S 0.5W 、 VPD15-24D 0.5W	3.15	Slow-Blow
VPD15-48S 0.5W 、 VPD15-48D 0.5W	1.6	Slow-Blow
VPD15-110S 0.5W 、 VPD15-110D 0.5W	1.0	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin..

MECHANICAL DRAWING

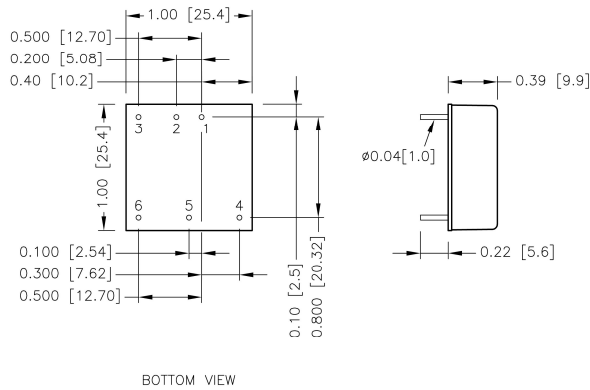


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout


- All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$]
 $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]
- Pin dimension tolerance ± 0.004 [0.10]

RECOMMENDED PAD LAYOUT


Standard

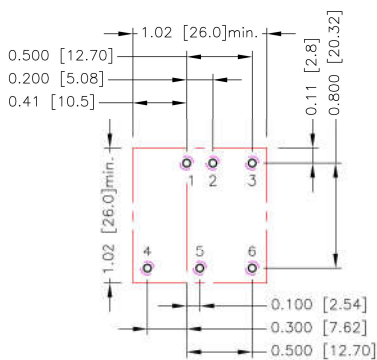

-HC

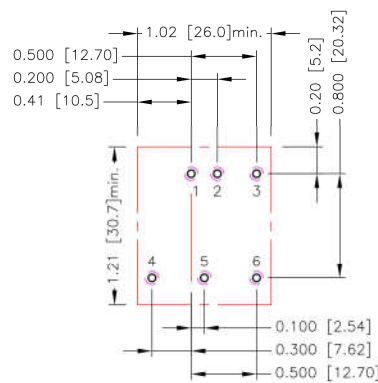

-HC1 、 -HC2 、 -HC3

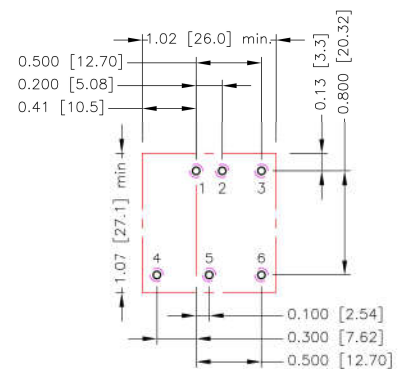

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5.6: $\Phi 0.051$ [1.30]
Top view pad 1.2.3.4.5.6: $\Phi 0.064$ [1.63]
Bottom view pad 1.2.3.4.5.6: $\Phi 0.102$ [2.60]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this Temperature to a lower value for extremely high reliability.


- Thermal test condition with vertical direction by natural convection (20LFM).

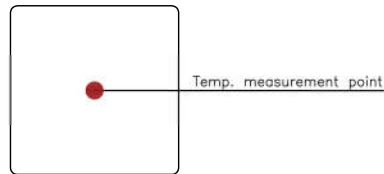

TOP VIEW


HEAT-SINK TYPE OPTIONS

VPD15-□□□□W-HC
7G- 0047C-F

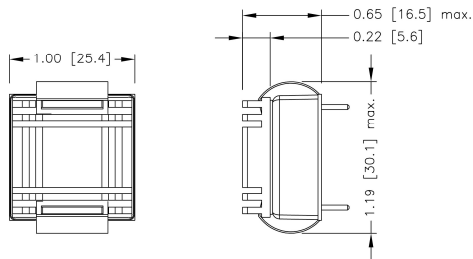


SIDE VIEW

VPD15-□□□□W-HC1
7GA0117P01-F

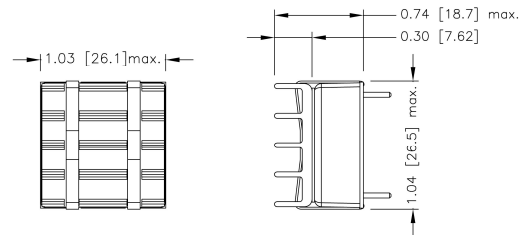


SIDE VIEW

VPD15-□□□□W-HC2
7GA 0118P01-F

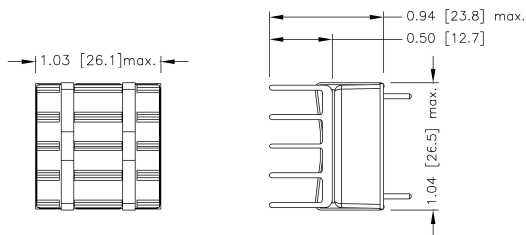

SIDE VIEW

VPD15-□□□□W-HC3
7GA0119P01-F

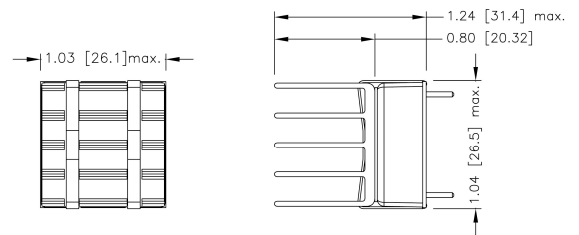

SIDE VIEW

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]

OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Output pin, the output voltage set point increases. With an external resistor between the Trim and +Output pin, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

Trim Down Equation

$$R_D = \left[\frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$


Trim Constants

Module	G	H	K	L
VPD15-□□S3P3W	5110	2050	0.8	2.5
VPD15-□□S05W	5110	2050	2.5	2.5
VPD15-□□S12W	10000	5110	9.5	2.5
VPD15-□□S15W	10000	5110	12.5	2.5
VPD15-□□S24W	56000	13000	21.5	2.5

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3W

△V (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662

□□S05W

△V (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

□□S12W

△V (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

□□S15W

△V (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

△V (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.650	16.800	16.950	17.100	17.250	17.400	17.550	17.700	17.850	18.000
RU (kΩ)	10.042	8.779	7.711	6.795	6.001	5.307	4.694	4.149	3.662	3.223


□□S24W

△V (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU (kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333

△V (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.640	26.880	27.120	27.360	27.600	27.840	28.080	28.320	28.560	28.800
RU (kΩ)	40.030	35.611	31.872	28.667	25.889	23.458	21.314	19.407	17.702	16.167

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k Ω)	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

□□S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

□□S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

□□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

□□S24W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD (k Ω)	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667