

KEY FEATURES

- Switching Power Module for PCB Mountable
- Fully Encapsulated Plastic Case
- Universal Input Range 90-264VAC, 47-440 Hz
- Regulated Output
- Low Ripple and Noise
- Small Size But Higher Wattage
- CE, CB and UL Approval
- 3-Year Product Warranty



ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Single Output)	VPKC-3.3S	VPKC-5S	VPKC-7.35S	VPKC-9S	VPKC-12S	VPKC-15S	VPKC-24S
Max output wattage (W)	14.85W	20W 20W		20W 20W		20W	20W
Output	Voltage (V.DC.)	3.3V	5V 7.35V	9V 12V		15V	24V
	Current (mA) max	4500 4000	2730 2230		1670	1340	840
	Voltage set accuracy	±2%	±2%	±2%	±2%	±2%	±2%
	Line Regulation (LL-HL) (typ.)	0.5%	0.5%	0.5%	0.5%	0.5%	0.5%
	Load Regulation (0-100%) (typ.)	1%	1%	1%	1%	1%	1%
	Minimum load	0% 0%	0% 0%		0%	0%	0%
	Efficiency (typ.)	75% 79%	82% 82%		83%	83%	84%
	Capacitor Load (max.)	25000 uF	13000 uF	2200 uF	1100 uF	920 uF	600 uF

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Dual Output)	VPKC-5D		VPKC-12D		VPKC-15D	
Max output wattage (W)	20W		20W		20W	
Output	Output 1	Output 2	Output 1	Output 2	Output 1	Output 2
	Voltage (V.DC.)	+5V -5V	+12V -12V	+15V -15V		
	Current (mA) max	2000 2000	833 833		667 667	
	Voltage set accuracy	±2%	±2%		±2%	
	Line Regulation (LL-HL) (typ.)	±0.5%	±0.5%		±0.5%	
	Load Regulation (10-100%) (typ.)	±3%	±3%		±3%	
	Minimum load	0% 0%	0%			
	Efficiency (typ.)	79% 82%	82%			
	Capacitor Load (max.)	±4300 uF	±560 uF		±220 uF	

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Triple Output)	VPKC-5S12D			VPKC-5S15D		
Max output wattage (W)	20W			20W		
Output	Output 2	Output 3	Output 1	Output 2	Output 3	
	Voltage (V.DC.)	+12 -12	5	+15	-15	
	Current (mA) max	250 250 2800	200		200	
	Voltage set accuracy	±5%	±2%	±5%		
	Line Regulation (LL-HL) (typ.)	5%	1%	5%		
	Load Regulation (20-100%) (typ.)	5%	2%	5%		
	Minimum load	10%		10%		
	Efficiency (typ.)	81% 81%				
	Capacitor Load (max.)	3500 uF / ±220 uF		3500 uF / ±150 uF		


All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Input	Voltage	90-264 VAC or 100-375 VDC
	Frequency (Hz)	47-440 Hz
	Current (Full load)	400 mA max. (115 VAC) / 270 mA max. (230 VAC)
	Inrush current (<2ms)	30 A max. (115 VAC) / 50 A max. (230 VAC)
	Leakage Current	0.25 mA
	External Fuse (recommend)	2 A slow blow type
	Power Saving	230V < 0.5W (except 24S)
Output	Ripple	<0.2% Vout +40mV max (Vp-p)
	Noise	<0.5% Vout +50mV max (Vp-p)
	Hold-up time (typ.)	13 ms min.
Protection	Over current protection	Above 105% rated output power
	Over voltage protection	Zener diode clamp
	Short circuit protection	Hiccup mode, indefinite (automatic recovery)
Isolation	Input-Output (V.AC)	3000V
	Input-FG (V.AC)	3000V
	Output-FG (V.AC)	500V
Environment	Operating temperature	-25°C...+70°C (with derating)
	Storage temperature	-40°C...+85°C
	Temperature coefficient	0.02%/°C
	Humidity 95%	RH
	MTBF	>400,000 h @ 25°C (MIL-HDBK-217F)
Physical	Dimensions (L x W x H)	2.73 x 1.87 x 0.85 Inches (69.5 x 47.5 x 21.7 mm) Tolerance ±0.5 mm
	Case Material	Plastic resin (flammability to UL 94V-0)
	Weight 1	10 g
	Cooling method	Free air convection
Safety	Agency Approvals	CE, UL/cUL, CB
EMC	EMI (Conducted & Radiated Emission)	EN 55032 class B
	EMS (Noise Immunity) EN	55024

NOTE


- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- The triple output required a minimum 10% loading on the output to maintain specified regulation.
Operation under no-load condition will not damage these devices; however they may not meet all listed specification.
- Load regulation for triple output:
Main output (V1): 20% to 100% with 20% to 100% balanced on auxiliaries.
Auxiliary outputs (V2 and V3): 20% to 100% balanced on all outputs.
- Cross regulation for dual output: asymmetrical load 25% / 100% FL
Cross regulation for triple output:
Main output 100% load, auxiliary 100%, other auxiliary 25% to 100%.
Auxiliary outputs (V2 and V3): main output 100% load, auxiliary 100%,
other auxiliary 25% to 100% or main output 25%, auxiliary 25%, other auxiliary 25% to 100%.
- It's necessary Varistor 14S471K at L / N input side in parallel.

MECHANICAL DIMENSIONS (Top View)


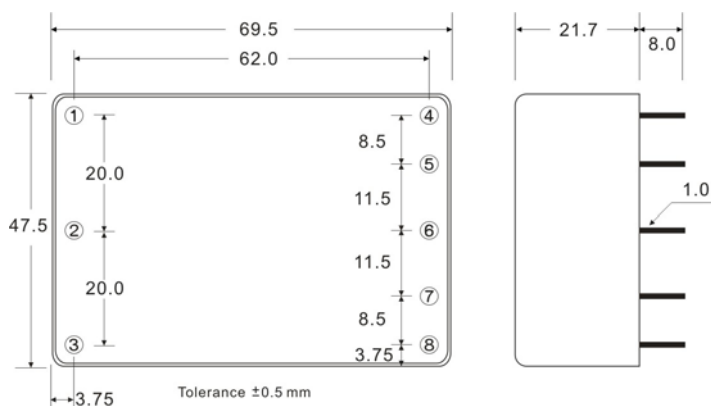


PIN#	Single	Dual	Triple
1	FG FG	FG	
2	AC IN (N)	AC IN (N)	AC IN (N)
3	AC IN (L)	AC IN (L)	AC IN (L)
4	NO PIN	NO PIN	-DC OUT
5	-DC OUT	-DC OUT	COMMON
6	NO PIN	COMMON	+DC OUT
7	+DC OUT	+DC OUT	+5V RTN
8	NO PIN	NO PIN	+5V OUT

BLOCK DIAGRAM

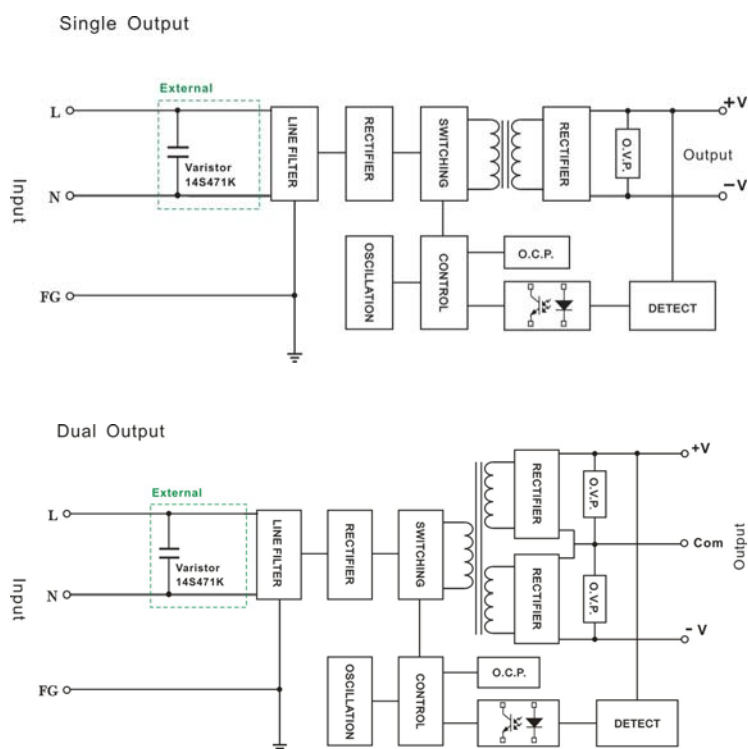


DERATING

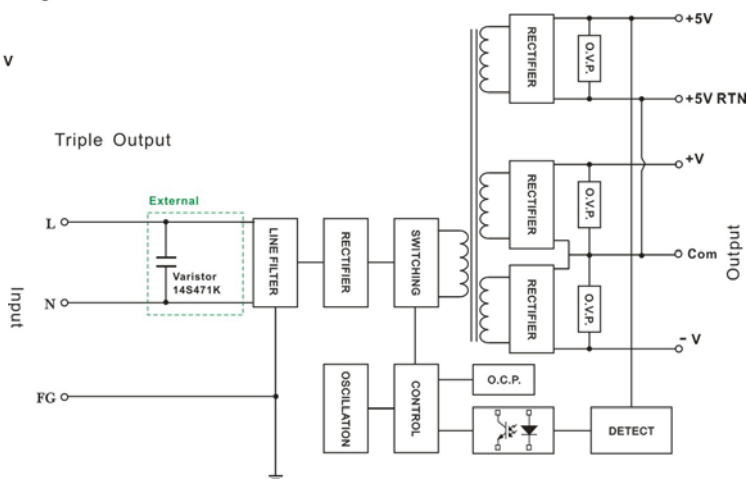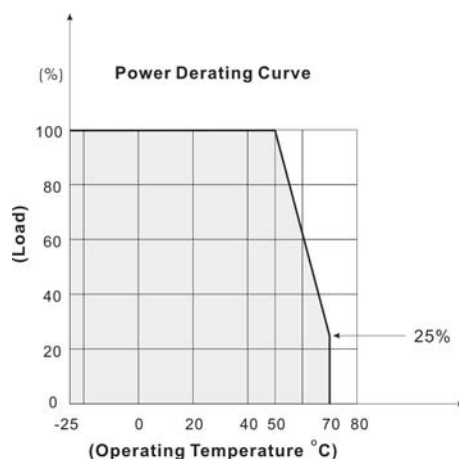

SCREW TERMINAL

VPKC-A2

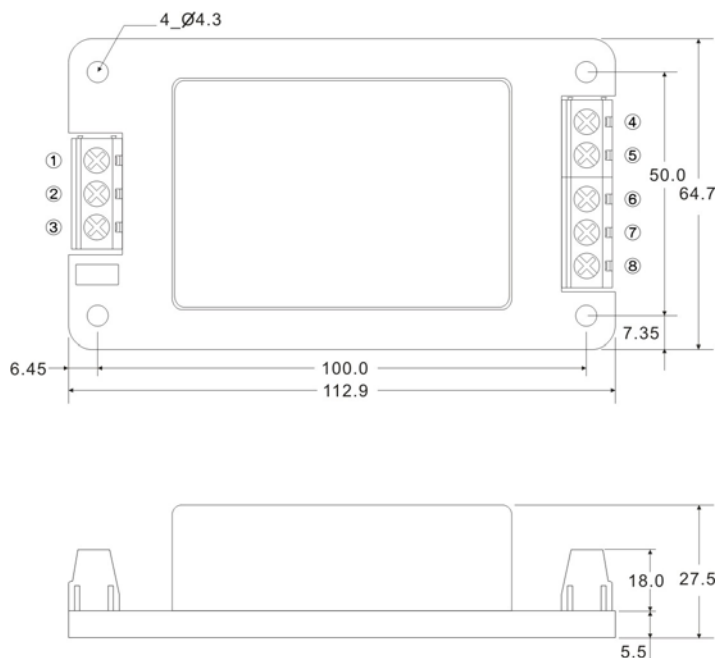

PIN#	Single	Dual	Triple
1	FG FG FG		
2	AC IN (N)	AC IN (N)	AC IN (N)
3	AC IN (L)	AC IN (L)	AC IN (L)
4	NO CONNECT	NO CONNECT	-DC OUT
5	-DC OUT	-DC OUT	COMMON
6	NO CONNECT	COMMON	+DC OUT
7	+DC OUT	+DC OUT	+5V RTN
8	NO CONNECT	NO CONNECT	+5V OUT

We reserve the right to make alterations in the product materials and specifications without prior notification and consent to improve reliability, function or design or otherwise.